

X-STICKER®

Technical features


Maximum width of labels	140 mm
Maximum length of labels	350 mm
Maximum speed	up to 20 mt/min*
Maximum roll diameter	250 mm
Core diameter	45/76 mm
Main frame	Steel with niplay treatments
External cover	Shockproof ABS
Dispensing blade	Adjustable 0-90°
Electronic control	Integrated control board
Speed adjustment	by potentiometer
Stop delay adjustment	by potentiometer

*Dependent on the label's dimensions



X-BASE

Easy positioning support unit composed by metal base with adjustable feet and wheels, vertical aluminum column, horizontal tubular arm with double position joint for top or side application.

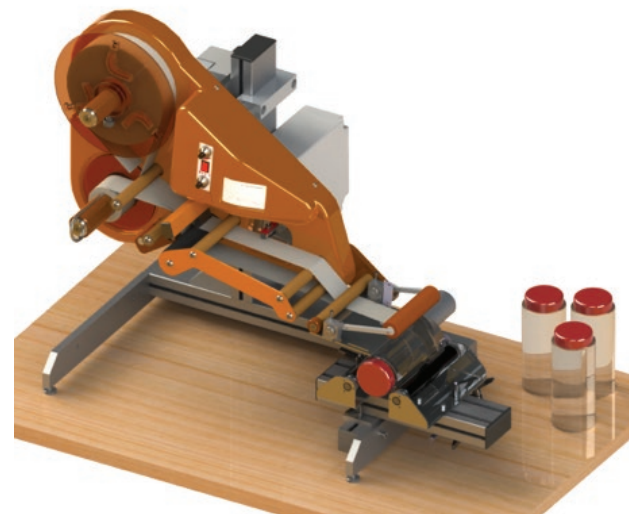

TR-HIT

Complete kit for semi-automatic application onto cylindrical product composed by top table structure for X-STICKER integration, adjustable positioning device with motorized roll and control box.