



## Panda®

Print & apply systems for high performances

### Standard features

Electronic unit	PLC
Display	Four colours Touch Screen
Printing unit	4" (105mm) 6" (160mm)
Applicator modules	Integrable on demand
Roll holder	300 mm
Rewinder	Motorized

Mechanical unwinder | Machine fault out-put signal

### Accessories

Start photocell  
Pre-end of roll alarm  
3 colours sign lamp



## Panda JR®

Print & apply systems for low and medium performances

### Standard features

Electronic unit	Microprocessor ER
Display	Numeric with keypad
Printing unit	4" (105mm) SATO LT-408
Applicator modules	AL-AF
Roll holder	300 mm
Rewinder	Motorized

Mechanical unwinder | Machine fault out-put signal

### Accessories

Start photocell  
Pre-end of roll alarm  
1 colour sign lamp

## APPLICATOR MODULES



### SERIES AL

Linear pneumatic applicator.



### SERIES AL-D

Double movement pneumatic applicator.



### SERIES AL-C

Angle pneumatic applicator.



### SERIES AC

Pneumatic applicator for vertical packaging machine.




### SERIES AB

Oscillating pneumatic applicator.



### SERIES AF

Pneumatic applicator with rotating arm.



### SERIES AD


Applicator with pneumatic blade.



## SUPPORT STRUCTURE



### PandA JR AL

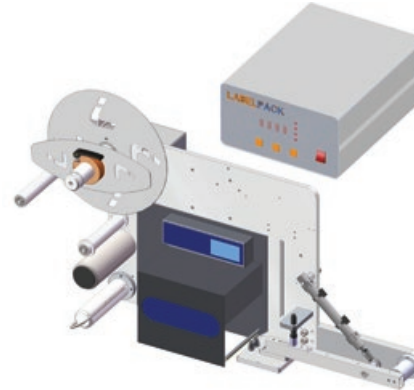

### PandA JR AF



### MXB

Support for top application with vertical and horizontal adjustment.



### MXB-OV

Support for side application with vertical and horizontal adjustment.



### MXB-OVS

Support for side application with vertical and horizontal adjustment and support for electric box ER-EW.